18.5" FHD One Port VGA LCD KVM Console (DLS-2801)




Date: 2020 / 03 Version: V1.0

1


Overview


DLS-2801 is an 18.5" FHD widescreen single port console which integrates the monitor, keyboard and mouse in a 1U device; it fits for installed in a standard 19" rack. It can connect one computer to control the monitor, keyboard and mouse.

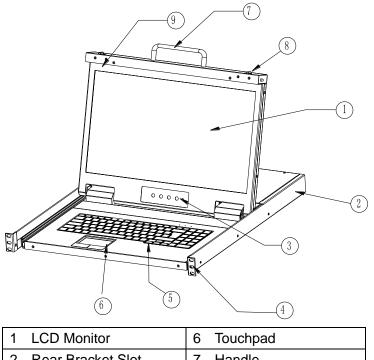

| 1 | LCD Monitor | 6 Touchpad |
|---|----------------------|------------------|
| 2 | Rear Bracket Slot | 7 Handle |
| 3 | Display Menu Buttons | 8 Release Switch |
| 4 | Mounting Bracket | 9 Display Panel |
| 5 | Keyboard | |

Structure

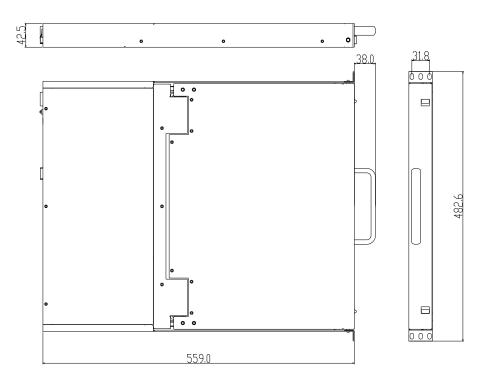

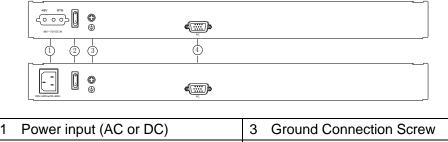


| 1 Power input (AC or DC) | 3 Ground Connection Screw |
|--------------------------|---------------------------|
| 2 Power Switch | 4 PC Port |

Features

- 3 in 1 LED console integrates the monitor, keyboard and mouse.
- The HD console can be connected to a PC or a KVM switch to control and manage single/multiple PCs.
- 18.5" FHD TFT monitor with high brightness, high definition and high resolution.
- High video quality: 1920*1080@60Hz
- Ultra-slim keyboard with 99 keys and numeric keypad
- Standard PS/2 touchpad
- Touchpad with trackball
- Automatically lock up with the front panel lock latch
- Compact steel construction and high quality hand-protection sliding rails

Connection Diagram

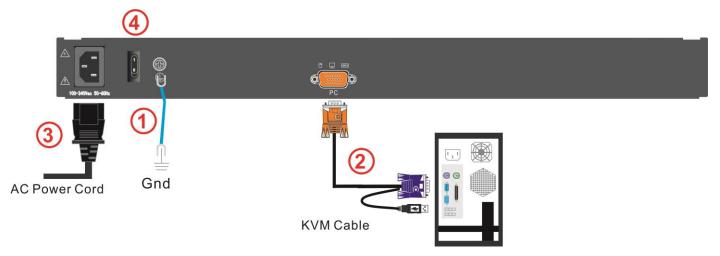

PC or Server

Specifications

| Model | | DLS-2801 |
|------------------------|--------------------|---|
| Computer Connection | | 1 |
| Port emulation | Keyboard, mouse | PS/2, USB |
| | LCD module | FHD TFT |
| | View area | 18.5 " |
| | Optimum resolution | 1920×1080@60Hz |
| LED monitor | Display color | 16.7 M |
| | Brightness | 500cd/m² (T y p) |
| | Contrast ratio | 1000:1(Тур) |
| | Pixel pitch(mm) | 0.213(H) × 0.213 |
| Mouse | X/Y resolution | >1000 points / inch, (40 points/mm) |
| Mouse | Scroll wheel | Support scroll wheel function |
| Keyboard | | 99 keys(82 keys main keyboard +17 independent small numeric keyboard) |
| Input power | | 100V– 240Vac , 50 ~ 60Hz , <1.5A |
| Power consumption | | 28 |
| Operating temperature | | 0−40 °C |
| Store temperature | | -20−60 °C |
| Humidity | | 0 – 80% RH, non-condensing |
| Net weight | | 11kg |
| Product dimension (W × | D × H) | 448mm×560mm×42.5mm |
| Package dimension (W : | × D × H) | 765mm×615mm×185mm |