


19" 1 Port DVI LCD KVM Console (LD1901)



Overview


Kinan's LD1901 is a rack mount LCD KVM Console that features an integrated 19" LCD monitor, full 99-key keyboard and touchpad in a 1U compact housing. The included cable allows for connection to a USB computer or KVM. Features a 19-inch LCD TFT panel, the LD1901 supports resolutions of up to 1280x1024@60Hz.


The LD1901 rack console features a single DVI port, which can be connected directly to a server or PC, or to a KVM switch to control multiple systems. The KVM monitor serves as the monitoring and managing console for standard KVM Switches.

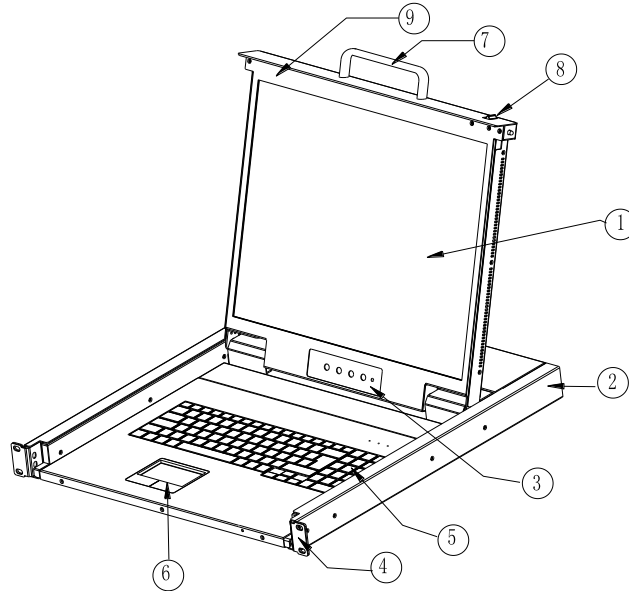

1 LCD Monitor	6 Touchpad
2 Rear Bracket Slot	7 Handle
3 Display Menu Buttons	8 Release Switch
4 Mounting Bracket	9 Display Panel
5 Keyboard	

Structure

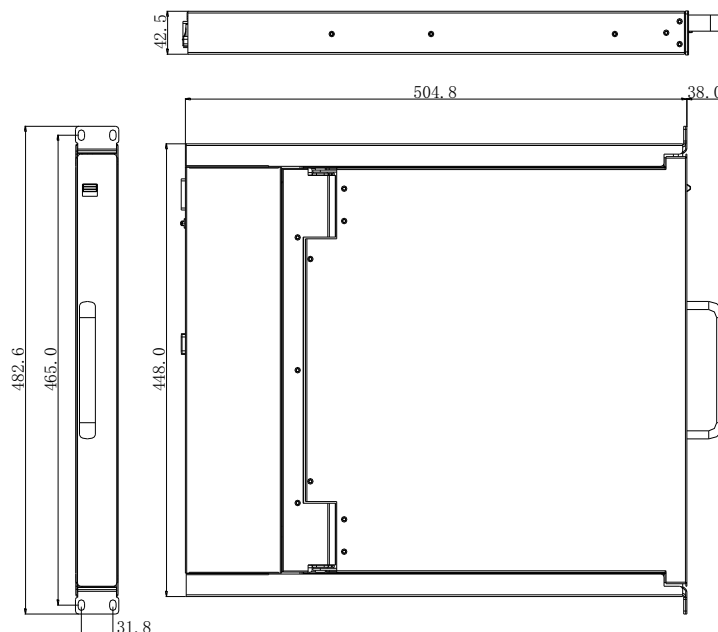

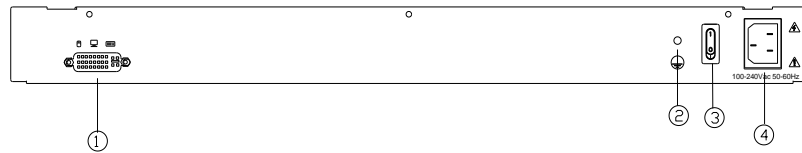

1	PC Port(DVI)	3	Power switch
2	Ground Connection Screw	4	Power input(AC or DC)

Features

- Integrated KVM Console with 19" LCD monitor, keyboard/touchpad
- Standard DVI connection-Connect to a server or computer via standard DVI connector
- LCD module can be opened up to 108 degrees to provide a comfortable viewing angle
- Support computers with USB keyboard and mouse
- Internal power supply
- 19" TFT LCD KVM with monitor supports highlight, high definition and high resolution
- Support input video resolutions up to 1280 x 1024 @60Hz
- Touchpad with scroll wheel - Eliminates the need for a separate, external mouse
- Multi-language support--English, Russian, German, French, UK and Italian, etc.
- Full size 99 keys keyboard with integrated number pad
- Multiplatform Support-Compatible with Windows, Sun, Unix and Linux
- Supports servers form Lenovo, HUA WEI, HP, IBM, Cisco and Dell, etc.

Connection Diagram



Package Contents

- 1x LCD Console
- 1x Power Cord (Regional)
- 1x Quick Start Guide
- 2x Mounting Rails
- 1x USB+DVI KVM Cable (1.8m/6ft)

Specifications

Model	LD1901	
Computer Connections	1	
Port emulation	Keyboard, mouse	PS/2, USB
LCD monitor	LCD model	SXGA TFT
	View area	19 "
	Optimum resolution	1280×1024@60Hz
	Display color	16.7 M
	Brightness	250cd/m ² (T y p)
	Contrast ratio	1000: 1 (T y p)
	Pixel pitch(mm)	0.2928(H) × 0.2928(W)
Mouse	X/Y resolution	>1000 points / inch, (40 points/mm)
	Scroll wheel	Support scroll wheel function
Keyboard	99 keys (82 keys main keyboard +17 independent small numeric keyboard)	
Input power	100V – 240Vac, 50 ~ 60Hz, <1.5A	
DVI Signal	DVI-D	
Power consumption	17W	
Operating temperature	0 – 50 °C	
Store temperature	-20 – 60 °C	
Humidity	0 – 80% RH, non-condensing	
Net weight	12 kg	
Product dimension (W × D × H)	448mm×505mm×42.5mm	
Package dimension (W × D × H)	765mm×615mm×185mm	