

2 Port HDMI KVM Switch with Audio

HD1102




Overview

2 port HDMI KVM Switches allows you to control up to 2 computers from a single console (keyboard, mouse and monitor). Switch between computers with hot keys, port selection buttons or mouse. Plug-and-play setup does not require software installation.

Product Features

- One HD1102 controls 2 HDMI computers or HDMI devices
- Support audio
- Support USB2.0 HUB
- Multiplatform support – Windows, Linux, Mac, Unix
- Easy switching between PCs via front panel pushbuttons, keyboard hotkeys
- Hot pluggable – add or remove computers without having to power down the switch
- Superior resolution - 3840×2160 @ 60 Hz
- Supports widescreen resolutions

Connection Diagram

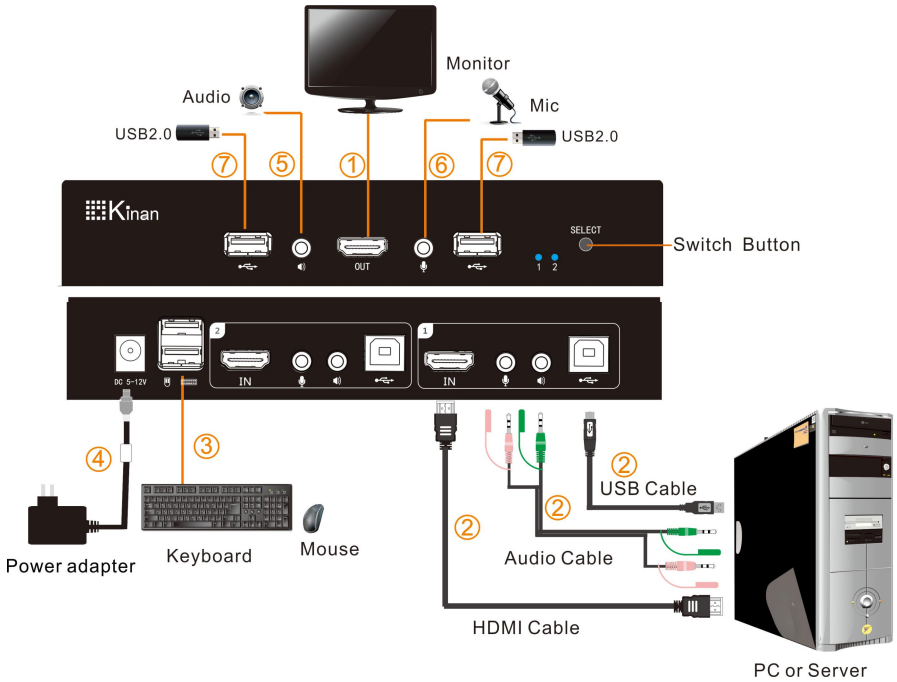

Specifications

| Model | | HD1102 | | |
|-----------------------|----------------|--------------------------|----------------------------|--|
| Computer Connection | | 2 | | |
| Port Selection | | Hotkey, button | | |
| Connector | Console | Monitor | 1x HDMI Type A | |
| | | Keyboard Mouse | 1x double layer USB type A | |
| | | Mic | 1x Min stereo port (pink) | |
| | | Speaker | 1x Min stereo port (green) | |
| | PC | Monitor | 2x HDMI Type A | |
| | | Keyboard Mouse | 2x USB type B | |
| | | Mic | 2x Min stereo port (pink) | |
| | | Speaker | 2x Min stereo port (green) | |
| | USB2.0 port | | 2x USB type A | |
| | Power | | 1x DC socket | |
| Switch | Port Selection | 1x button | | |
| LEDs | Selected | 2 (Blue) | | |
| Resolution | | 3840×2160 @ 60 Hz | | |
| Power Consumption | | 2W | | |
| Power Input | | 5V- 12V DC | | |
| Operating Temperature | | 0 ~ 50 °C | | |
| Storage Temperature | | -20 ~ 60°C | | |
| Humidity | | 0~80% RH, non-condensing | | |
| Net Weight | | 0.4kg | | |
| Dimension (W × D × H) | | 185mm × 74mm × 32.5mm | | |