17.3" Rack-Mount LCD Console (VGA / DVI / HDMI)

SW1731




Overview

The SW1731 DVI VGA LCD Console is a short depth single rail LCD KVM console featuring a 17.3" widescreen LCD monitor with an integrated keyboard and touchpad. It supports three types of video inputs – HDMI, DVI, and VGA – allowing users to connect the console and the computer via any of the three types of video source.

Features


- 17.3 in. Widescreen LCD monitor, keyboard, numeric keypad and touchpad
- All-in-one control of computer, server or KVM Switch
- Support three types of video inputs HDMI, DVI, and VGA
- 17.3" FHD LCD screen offers resolutions of up to 1920 x 1080@60Hz
- Ultra thin 99-key US keyboard with numeric keypad
- Integrated touchpad Eliminates the need for a separate, external mouse
- Supports hot-plugging
- Auto locking slide rail



Appearance

Figure 1.1 appearance


Front View

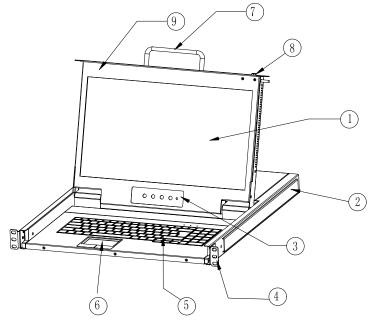

1. LCD monitor

- 6. Touchpad
- 2. Rear Bracket Slot
- 3. OSD Controls
- 4. Front Bracket
- 5. Keyboard
- 7. Handle
- 8. Release Lock
- 9. Display Panel

Connection Diagram

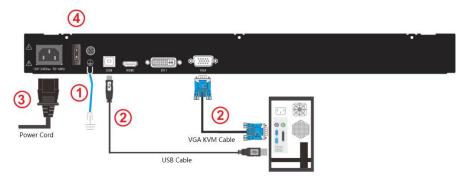

Note: The USB cable must be connected to the PC/server.

Cables

No.	Cables	Model No.	Cable Length	Remarks
1	USB cable	CU-1500	1.5 M	Included in the package
2	VGA KVM Cable	KA-1500	1.5 M	Included in the package
3	DVI KVM Cable	DV-1500	1.5 M	Included in the package
4	HDMI KVM Cable	HD-1500	1.5 M	Included in the package

Specifications-17.3"

Model		SW1731	
Computer	Direct	1	
Connections	Max	1	
Port emulation Keyboard, mouse		PS/2, USB	
	LCD model	FHD TFT	
	View area	17.3"	
	Optimum resolution	1920×1080@60Hz	
LCD monitor	Display color	262К	
	Brightness	300cd/m² (T y p)	
	Contrast ratio	800: 1(T y p)	
	Pixel pitch(mm)	0.1989(H) × 0.1989(W)	
Mouse	X/Y resolution	>1000 points / inch, (40 points/mm)	
Mouse	Scroll wheel	Support scroll wheel function	
Keyboard		99 keys (82 keys main keyboard +17 independent small numeric keyboard)	
Video Inputs		HDMI, DVI, VGA	
Power input rating	g	100V-240Vac, 50~60Hz, <1.5A	
Power consumption	on	13W	
Operating temper	ature	0−50 °C	
Store temperature	5	-20— 60 ℃	
Humidity		0—80% RH, non-condensing	
N.W.		11.7 kg	
Product dimension	n (W × D × H)	448mm×525.6mm×42.5mm	
Package dimensio	$n (W \times D \times H)$	765mm×615mm×185mm	