

# 1U Short Depth Rack Mount 15.6" LCD KVM Console

(LH1601)



www.kinankvm.com


@All right reserved Shenzhen Kinan Technology Co., Ltd.

Date: 2024/11

Version: V 1.0


## Overview

The LH1601 1U rackmount console is the ideal solution for ETC specialized rack, 5G rack, network specialized rack and standard server rack. Featuring an integrated 15.6" LCD display, full-99 key keyboard and touchpad, all in a 1U rack-mountable housing, it supports the shortest mounting depth: 360mm. This console is designed with two anti-vibration fixing screws on the front panel to prevent the console during transportation and operating.

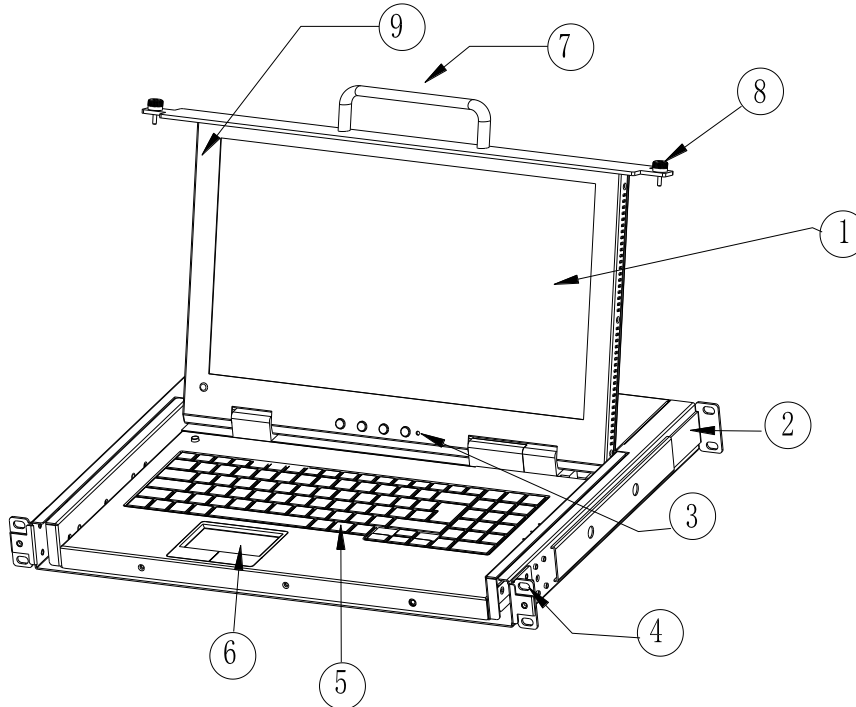

1 LCD Display	6 Touchpad
2 Rear Bracket	7 Handle
3 LED OSD Controls	8 Fixing Screw
4 Front Bracket	9 Display Panel
5 Keyboard	


## Structure

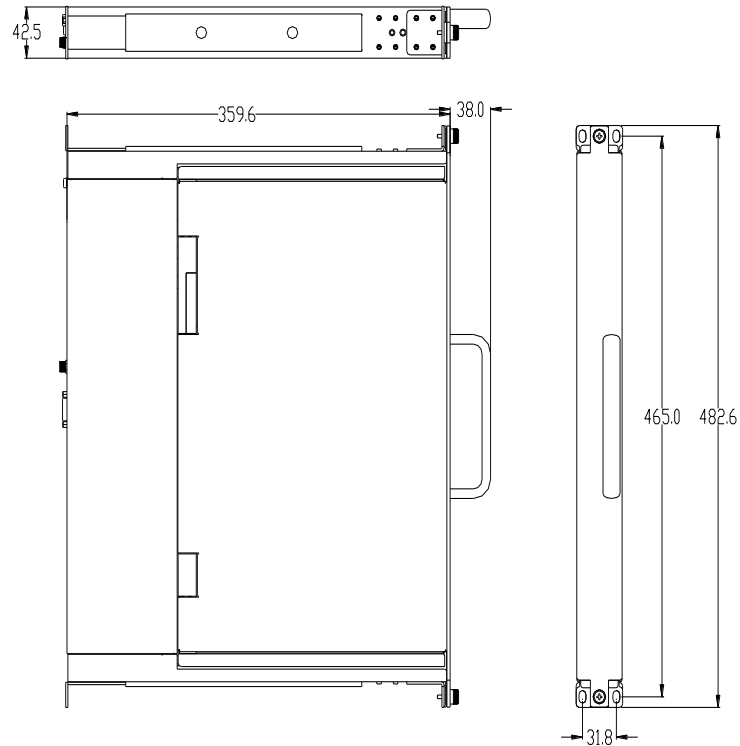

## Features

- 15.6" FHD LCD display, 99-key keyboard, touchpad
- Rack-mountable in 1U system rack
- Short depth: 360mm
- Auto USB interface detection
- High resolution and high flexibility with touchpad; with two function buttons and scroll wheel
- Resolution is up to 1920 x 1080@60Hz
- Constructed of heavy-duty steel in a 1U housing
- Energy-saving LCD display, the screen automatically shut down when closing the LCD monitor

## Connection Diagram

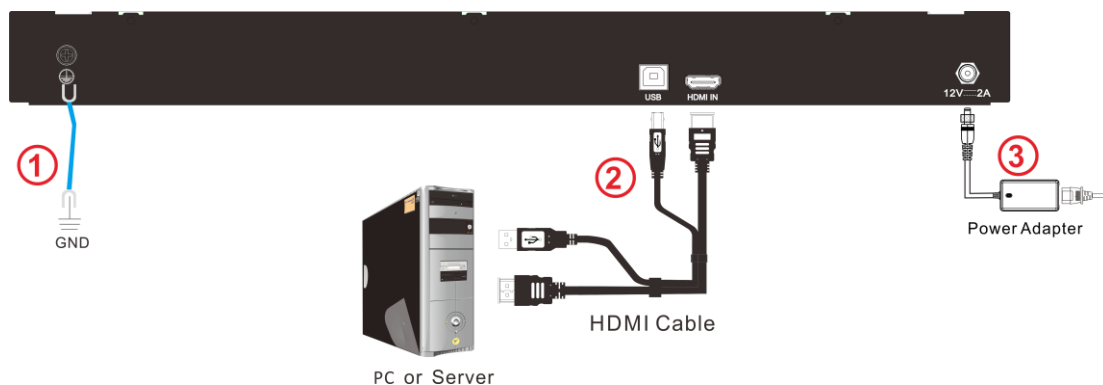

**Specifications**

<b>Model</b>		<b>LH1601</b>
Computer connections	Direct	1
	Max	1
Port emulation	Keyboard, mouse	USB
LCD monitor	LCD model	FHD TFT
	View area	15.6 "
	Optimum resolution	1920 x 1080@60Hz
	Display color	16.2M
	Brightness	250cd/m <sup>2</sup> ( T y p )
	Contrast ratio	800 : 1 ( T y p )
	Pixel pitch(mm)	0.17925(H) × 0.17925(V)
Mouse	X/Y resolution	>1000 points /inch,( 40 points/mm )
	Scroll wheel	Supports scroll wheel function
Keyboard		99 keys (82 keys main keyboard +17 independent small numeric keyboard)
Input power		DC12V /2A
Power consumption		9W
Operating temperature		0—50 °C
Store temperature		-20—60 °C
Humidity		0—80% RH, non-condensing
Net weight		8.7kg
Product dimension (W ×D ×H)		448mm×360 mm×42.5mm
Package dimension (W× D× H)		600mm×538mm×160mm